


Snorkel

SL15

Lightweight and narrow, these machines fit in most standard elevators and, with their wide variety of standard features, are ideal for slab-type construction, building renovation, or maintenance work of all types.

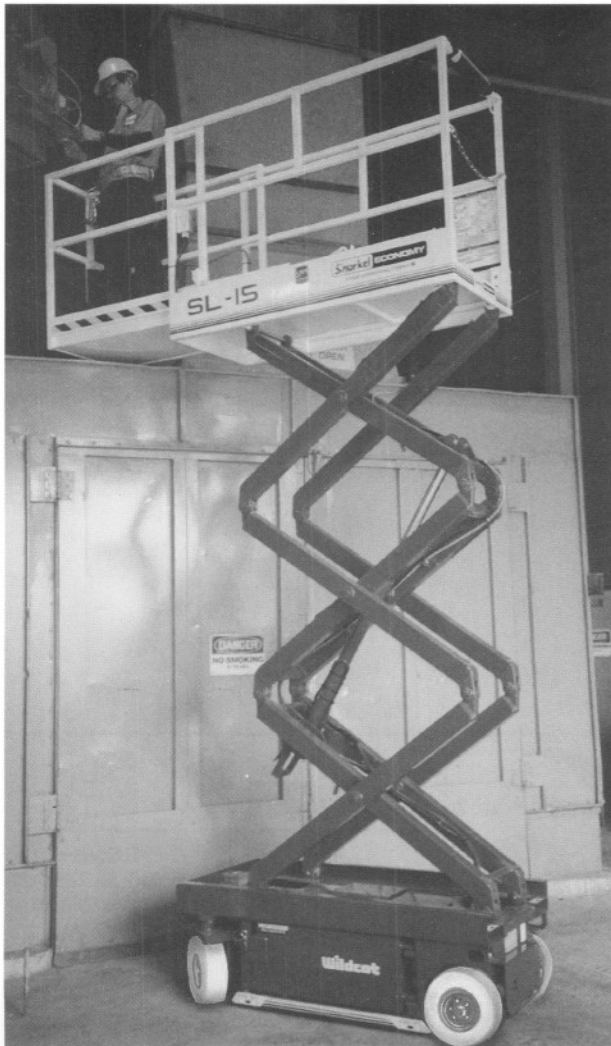

CE

S P E C I F I C A T I O N S

Working Height	21'	6.4 m
Platform Height	15'	4.6 m
Capacity*	600 lbs.	272 kg
Size	29" x 64"	74 x 162 cm
Guardrail Height	42"	107 cm
Toeboard Height	6"	15 cm
Stowed Platform Height	36"	91 cm
Stowed Overall Height	78"	198 cm
Overall Width	30"	76 cm
Overall Length	65"	165 cm
Wheelbase	53"	135 cm
Turning Radius		
Inside	14 ¹ / ₄ "	36 cm
Outside	72 ¹ / ₄ "	184 cm
Gradeability		25%
Drive Speed		
Speed No. 1 Elevated	0.4 mph	0.6 kph
Speed No. 2 Stowed	1.2 mph	1.9 kph
Speed No. 3 Stowed	2.1 mph	3.4 kph
Platform Lift Speed (3 speed control)		15 sec. minimum
Ground Clearance (Approx.)		
Platform Stowed/Pothole Protector Raised	2 ³ / ₄ "	7.0 cm
Platform Raised/Pothole Protector Lowered	3/ ₄ "	1.9 cm
Tire Size		4 x 12
Type		Solid Rubber
Weight (approx.)	2,300 lbs	1,043 kg
Shipping Cube		
With Guardrails	88 ft. ³	2.5 m ³

*Rated load on roll-out extension deck is 250 lbs. (113 kg)

- Automatically activated pothole protection
- Built-in level sensor interlocks
- Fits in most standard elevators
- 3' roll-out extension
- Printed circuit board with on-board LED diagnostics
- Joystick with finger-grip control on removable console
- Responsive center pivot-type steering
- 3-speed drive/3-speed lift
- Dual wheel drive system
- Drive motion alarm
- 2-wheel parking brakes
- Built-in scissor arm safety support
- Driveable at full work height
- Swing-out trays for batteries and hydraulics
- Non-marking tires
- Battery powered with built-in smart charger
- Forklift loadable from 3 sides
- 60 month factory warranty


Snorkel

SL15

Narrow Slab SCISSORS

Optional Equipment

- Swinging gate
- 125 volt GFCI AC outlet at platform
- D-Ring lanyard attachments
- Operator horn
- Flashing light
- Battery condition indicator
- EE rating

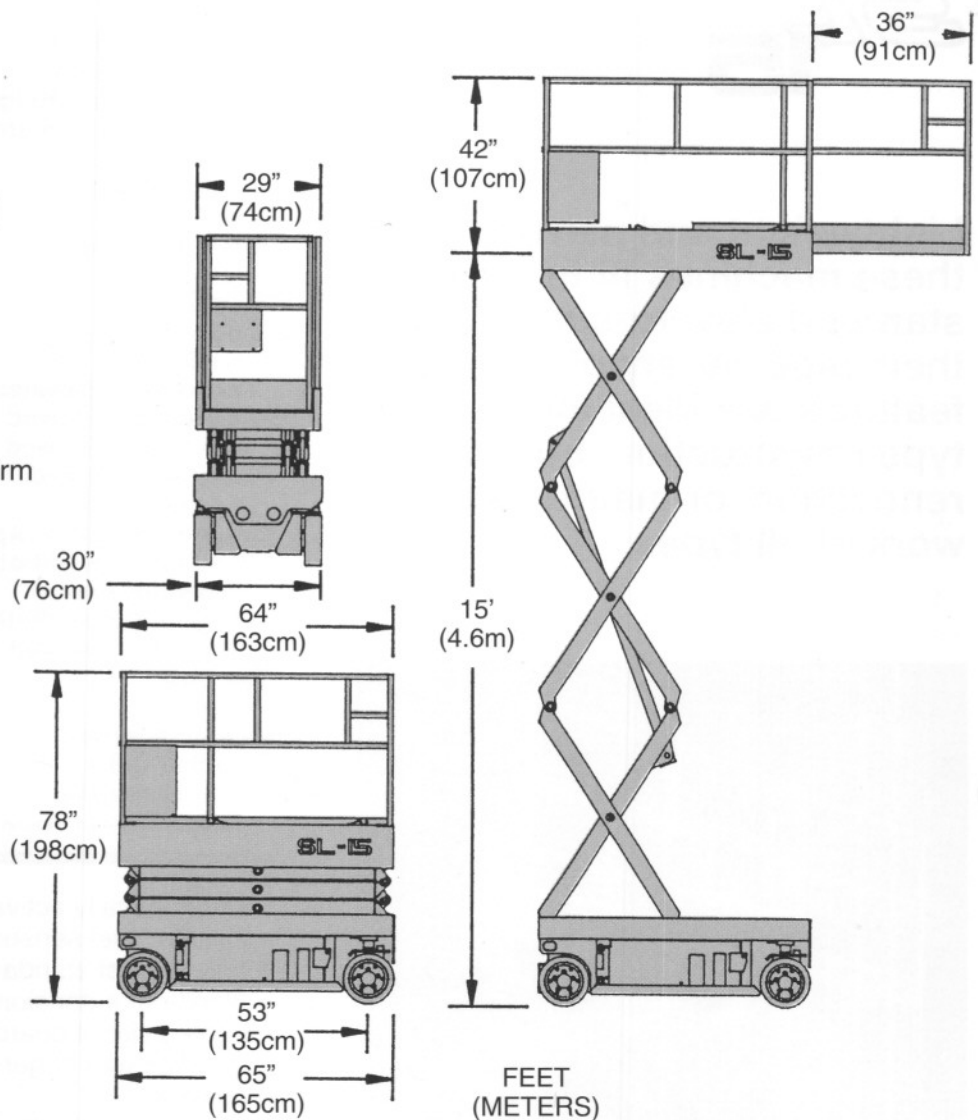

DANGER: Models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energized conductors which is pointed out on decals and placards attached to the machine.

Only qualified and trained operators are to be authorized to use and operate a work platform.

Aerial work platforms must be elevated only on firm, level surface.

Products in this brochure comply with applicable ANSI Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice or obligation.

OmniQuip Snorkel

An ISO 9001 Registered Company

P.O. Box 1160
St. Joseph, MO 64502-1160
816-364-0317 ♦ Fax: 816-364-0380

www.snorkelusa.com

Printed in U.S.A.
SL-15 9-98